

Light shapes the city of tomorrow.

PUBLIC LIGHTING · SOLAR · CONNECTED

SMART CITY

WIRELESS MESH NETWORK

DATASHEET


2026

D-SLS solar streetlight · cylindrical photovoltaic shaft · MPPT-ATMANI-AI controller

D-SLS
Digital Smart Lighting Solutions

D-SLS SOLAR STREETLIGHT · OVERVIEW

A complete, autonomous set: light, energy and intelligence integrated in a single column

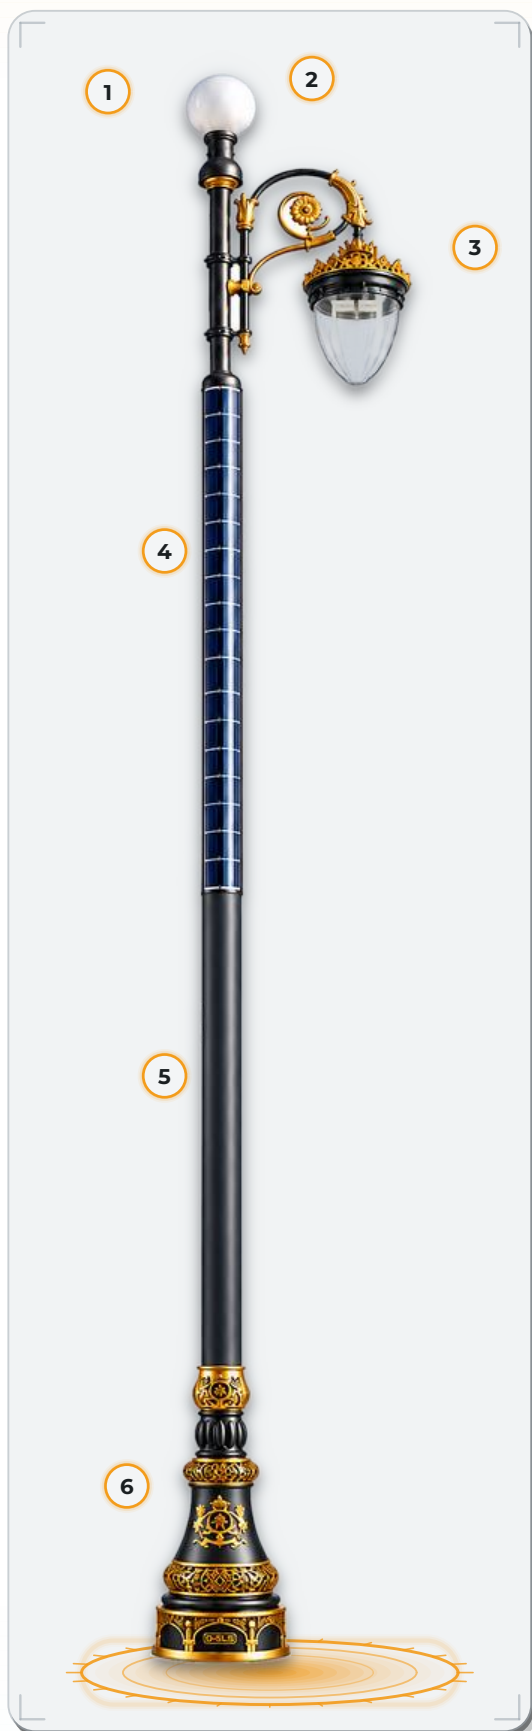

1 Light finial — globe version
Addressable RGBW + amber · anti-theft signal to customer's choice

2 Gilded ornamental bracket
scroll bracket, gold finish — carries the lantern

3 D-SLS-28 crown lantern
20 – 150 W · 187 lm/W · indirect reflector $\rho \geq 98\%$ · ogival diffuser

4 Cylindrical glass photovoltaic shaft
harvests light over 360° · no panel at pole top

5 Integrated MPPT-ATMANI-AI controller
MPPT · 16S storage · D4i + DT8 LED driver · TALQ 2.7.1

6 Royal skirt — ref. JUPROYEC
black & gold, royal emblem, zellige · registered design no. 30164

20 – 150 W

LED power

187 lm/W

lantern efficacy

360°

solar harvesting

3 nights

reference autonomy


0

connection · trenching

TALQ 2.7.1

remote management

Indirect reflector (inter-reflection) — reflectance $\geq 98\%$



Satin aluminium reflector optics, the LED is never seen directly: reflected, anti-glare light, no PMMA lens. Reflectance $\geq 98\%$, ULOR 0 %, asymmetric road distribution. One-piece LED matrix, screw-removable.

ASSEMBLY CONTENTS · ONE REFERENCE, ONE FULL PRICE

Everything needed to operate the light point is included in the supply

1



D-SLS-28 crown lantern

20 – 150 W · LUSO-5050AUX LED
· 187 lm/W · D4i + DT8 driver · clear
ogival diffuser.

2



Ornamental bracket

Scroll crook with rosette, gold
finish — lantern fixed on pole top.

3



Globe light finial

1 – 10 W addressable RGBW +
amber · IP65 / IK10 · anti-theft
signal of choice.

4



Photovoltaic shaft

Cylindrical glass panel integrated
into the pole — 360° capture, no
orientation needed.

5



MPPT-ATMANI-AI controller

MPPT · BMS 16S · 400 W LED
driver · weather AI · AMOLED ·
TALQ 2.7.1.

6



Royal skirt JUPROYEC

Black & gold base — royal emblem,
zellige · registered design no.
30164.

Included in the supply

- Integrated 16S storage — supercapacitors or lithium (LiFePO4)
- Internal wiring and plug-in connectors
- Factory settings: dimming profiles, reserve, DALI addresses
- Commissioning and operator training

Options

- LidarMesh CMS remote management (TALQ 2.7.1)
- LiDAR-ATMANI-AI node — dimming on detection
- Hybrid solar + grid mode or backup on power failure
- Colour, frieze and decoration defined on order

PHOTOVOLTAIC SHAFT · CYLINDRICAL GLASS PANEL

Energy harvested by the pole itself



360° capture

The cylindrical surface receives sun from morning to evening, whatever the street's orientation: no azimuth or tilt adjustment.



Integrated, discreet, protected


Cells under glass, integrated in the shaft: no panel on the pole top, less wind load and no target for vandalism.



Measured output

The controller traces the shaft's I-V curve: shading, soiling or degradation are detected and reported remotely.

ENERGY CHAIN

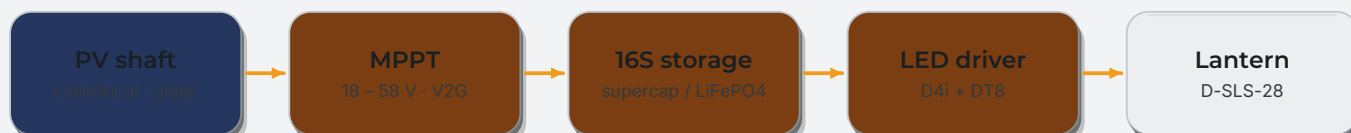

All energy is managed by the MPPT-ATMANI-AI controller, housed in the assembly.

Reference sizing — 3 nights of autonomy

LED power	Lantern flux	PV peak power	Usable storage
20 W	3 740 lm	60 Wp	300 Wh
60 W	11 220 lm	150 Wp	800 Wh
100 W	18 700 lm	250 Wp	1 350 Wh
150 W	28 050 lm	400 Wp	2 000 Wh

Project-specific sizing

The photovoltaic shaft is sized to reach the required peak power; the controller's AI adapts the reserve each night to the weather forecast. Beyond the shaft's capacity, hybrid solar + grid mode takes over. Each project is subject to an irradiation study and a sizing note.

INTEGRATED CONTROLLER · MPPT-ATMANI-AI

A single device — from solar energy to cloud control



Autonomy display readable from the ground

18 – 58 V

PV input · bidirectional MPPT

16S BMS

supercap / lithium · active balancing

400 W

CW/WW LED driver · D4i + DT8

IP66

die-cast aluminium housing

INTEGRATED CONTROLLER



Predictive AI

Reserve adapted to forecast rain and cloud: the lantern runs for several nights without sun.



Multi-chemistry storage

Supercapacitors for extreme climates (–40 °C) or lithium for long autonomy — same board.



Lantern control

Tunable white CW/WW 2700 – 6500 K, D4i + DT8 dimming, thermal derating, GPS astronomical calendar.



Field maintenance

AMOLED display, NFC without opening, USB-C, replaceable fuse — diagnostics at the pole base.



Safety & anti-theft

WireGuard VPN, signed OTA with rollback, GPS + accelerometer anti-theft with alarm.



Connected node

DALI-2 / D4i, Zhaga Book 18 receptacle, self-healing MESH, TALQ 2.7.1 remote management.

THE LIGHT · LANTERN, FINIAL & ROYAL SKIRT

Three handcrafted elements, one shared D-SLS technical core



D-SLS-28 crown lantern

Decorative LED lantern — gilded crown and frieze

Power	20 – 150 W
Efficacy	187 lm/W — up to 28 050 lm at 150 W
Source	LUSO-5050AUX LEDs under flat tempered glass
Optics	Indirect reflector $\rho \geq 98\%$ · ogival bowl
Control	D4i + DT8 driver · tunable white
Mounting height	up to 10 m

20 – 150 W

187 lm/W

D4i + DT8



Light finial — globe version

Pole crowning, light signal

Power	1 – 10 W
Source	Addressable RGBW + amber LED · DALI+
Diffuser	White opal globe Ø 150 mm, anthracite base
Protection	IP65 / IK10
Function	Anti-theft: light signal of the client's choice
Network	TALQ 2.7.1 · IPv6 mesh

RGBW + amber

IP65 / IK10

Anti-theft



Royal skirt — ref. JUPROYEC

Your city's identity, lit up at night

Finish	Matt black & gold
Décor	Royal emblem (lions, crown, star), zellige, Andalusian arches
Customisation	Per project
Protection	Industrial design no. 30164 (Law 17/97), protected until 19/05/2030

Black & gold

Registered design

POWER SCENARIOS

The operating mode is configured — not wired



Stand-alone — off-grid

PV shaft + storage only: zero connection, zero trenching. Weather AI sizes the reserve for several sunless nights.



Hybrid solar + grid

Solar first, seamless grid back-up: the bill melts away, continuity is absolute.



Backup on power cut

The grid supplies power; at the slightest outage, storage takes over seamlessly — lighting remains a safety service.

REMOTE MANAGEMENT & DETECTION · OPTIONS

Every street light becomes a measuring and control point



LidarMesh CMS

Map of every light point, state of charge, solar yield, alarms and history — TALQ 2.7.1 interoperable.



LiDAR-ATMANI-AI node

Image-free detection of pedestrians, cyclists and vehicles: light rises on approach and saves energy the rest of the night.



MESH network

Each street light relays its neighbours; a single gateway serves a whole section.



Optimised cleaning

PV shaft soiling index reported by each point: cleaning rounds planned from the office.

Night profile

Typical scenario: 100 % at dusk, programmed dimming in the middle of the night, instant boost on LiDAR detection, back to 100 % before dawn — the energy reserve is preserved for sunless nights.

TECHNICAL SPECIFICATIONS

D-SLS-28 S 20-150 — DATASHEET

Assembly	Complete solar streetlight: lantern + bracket + finial + PV shaft + controller + storage + skirt
Lantern	Crown D-SLS-28 · 20 – 150 W · 187 lm/W · LUSO-5050AUX LED · D4i + DT8 driver
Finial	Globe version Ø 150 mm · 1 – 10 W · addressable RGBW + amber · IP65 / IK10 · anti-theft signal
Energy	Cylindrical glass photovoltaic shaft · 360° capture · sized per project
Controller	MPPT-ATMANI-AI · PV input 18 – 58 V · bidirectional MPPT · 400 W LED driver · IP66
Storage	16S — supercapacitors or lithium (LiFePO4) · active-balancing BMS · SoC / SoH
Autonomy	3 reference nights · AI predictive reserve based on weather
Modes	Off-grid stand-alone · hybrid solar + grid · backup on outage
Connectivity	DALI-2 / D4i · Zhaga Book 18 · WiFi 6 · BLE · IPv6 · MESH · GPS
Remote management	TALQ 2.7.1 · LidarMesh CMS · WireGuard VPN · signed OTA
Maintenance	AMOLED display · NFC without opening · USB-C · I-V scan of the PV shaft
Socket	Royal skirt JUPROYEC · black & gold · registered design no. 30164
Finish	Colour, frieze and decoration defined at order

360° solar

MPPT

16S

D4i + DT8

TALQ 2.7.1

IP66

Anti-theft

Registered design

Sales & technical contact

E-mail	sa@d-sls.com
WhatsApp	+39 333 765 0586
Web	www.d-sls.it
Head office	D-SLS SRL — Via Bocchetto 6, 20123 Milano (MI), Italia



D-SLS SOLAR STREETLIGHT

D-SLS SRL — Digital Smart Lighting Solutions

Via Bocchetto 6 • 20123 Milano (MI) • Italia • P.IVA IT14260650966
sa@d-sls.com • WhatsApp +39 333 765 0586 • www.d-sls.it

D-SLS-28 S 20-150 datasheet • D-SLS solar lamp post • Rev. 10/2026 • Non-contractual document: D-SLS reserves the right to change specifications without notice.



www.d-sls.it



Direct WhatsApp



sa@d-sls.com